

Riverside Community Centre — Structural Refurbishment

Full structural assessment, remedial works, and interior fit-out. Phase 1 contract.

Table of Contents

Initiation	3
Upgrade the 1972-built community centre to modern seismic and energy standards while retaining the original façade. Estimated 20-year asset life extension.	3
The council faces a binary choice: invest in refurbishment at ~\$1.8M or demolish and rebuild at ~\$4.5M. Refurbishment preserves a heritage asset, reduces embodied carbon by 60%, and keeps the facility operational for the neighbourhood during works.	3
Project Objectives	3
Success Criteria	3
Stakeholder Register	3
Assumptions Log	4
Planning	5
Project Boundaries (Scope)	5
Requirements Register	5
Milestones	7
Budget Details	7
Gantt Chart	10
Quality Plan	10
Communication Plan	11
Risk Management Strategy	11
Compliance Register	12
Project Team	12
Execution	13
Status Report	13
Risk Matrix	13
Issue Log	13
Change Log	14
Decision Log	14
Deliverables Register	14
Closure	15
Formal Sign-Off	15
Custom Sections	16
Site Safety Plan	16

Initiation

Upgrade the 1972-built community centre to modern seismic and energy standards while retaining the original façade. Estimated 20-year asset life extension.

Upgrade the 1972-built community centre to modern seismic and energy standards while retaining the original façade. Estimated 20-year asset life extension.

The council faces a binary choice: invest in refurbishment at ~\$1.8M or demolish and rebuild at ~\$4.5M. Refurbishment preserves a heritage asset, reduces embodied carbon by 60%, and keeps the facility operational for the neighbourhood during works.

The council faces a binary choice: invest in refurbishment at ~\$1.8M or demolish and rebuild at ~\$4.5M. Refurbishment preserves a heritage asset, reduces embodied carbon by 60%, and keeps the facility operational for the neighbourhood during works.

Project Objectives

ID	Objective	Priority
OBJ-1	Complete structural remediation to NZS 3101 compliance	high
OBJ-2	Achieve 7.5-star NatHERS energy rating	high
OBJ-3	Maintain 70% facility operation throughout works	high
OBJ-4	Deliver within approved \$1.82M budget	neutral

Success Criteria

ID	Type	Criterion	Measurement	Objective
SC-1	project	Seismic IEP score $\geq 67\%$ NBS	IEP assessment $\rightarrow \geq 67\%$	OBJ-1
SC-2	product	Energy star rating	NatHERS certificate $\rightarrow 7.5\star$	OBJ-2
SC-3	project	Operational continuity	% facility accessible $\rightarrow \geq 70\%$	OBJ-3
SC-4	project	Final cost vs. approved budget	Cost variance $\rightarrow < +5\%$	OBJ-4

Stakeholder Register

ID	Name / Role	Organization	Interest	Influence	Engagement
SH-1	Riverside District Council — Client / Funder	-	high	high	Weekly progress meeting

SH-2	Structural Works Ltd — Head Contractor	-	high	high	Daily site briefing
SH-3	Community Users Group — End Users	-	high	medium	Monthly update newsletter
SH-4	Heritage NZ — Regulatory Body	-	medium	high	Milestone sign-off
SH-5	Building Consents Authority — Regulatory Body	-	low	high	Inspection hold points

Assumptions Log

ID	Type	Description	Status	Risk
A-1	assumption	Ground conditions match 2024 geotechnical report	Validated	-
A-2	constraint	Heritage façade cannot be altered or clad	Validated	-
A-3	assumption	Asbestos removal complete before structural works	Open	R1
A-4	dependency	Council budget appropriation confirmed by June	Validated	-

Planning

Project Boundaries (Scope)

In Scope

- Seismic retrofit — base isolation and moment frames
- Roof replacement with insulated metal deck
- Façade repointing and damp-proof membrane
- Mechanical/electrical systems upgrade
- Interior fit-out (3 community rooms + foyer)
- Accessibility compliance (DDA)
- Landscaping — car park reseal and ramp construction

Out of Scope

- Kitchen equipment (separate council procurement)
- IT infrastructure (separate contract)
- Furniture and loose fittings
- External signage

Requirements Register

Structural

ID	Description	Qty	Unit	Unit Cost	Priority
REQ-01	Seismic base isolation system COMP-1	1	system	\$320,000.00	high
REQ-02	Moment-resisting steel frames	4	frames	\$45,000.00	high

Subtotal: \$500,000.00

Envelope

ID	Description	Qty	Unit	Unit Cost	Priority
REQ-03	Roof replacement — insulated metal deck	1	job	\$185,000.00	high
REQ-04	External façade repointing + membrane COMP-2	680	m ²	\$180.00	high

Subtotal: \$307,400.00

Mechanical

ID	Description	Qty	Unit	Unit Cost	Priority
REQ-05	HVAC replacement — VRF system	1	system	\$145,000.00	high

Subtotal: \$145,000.00

Electrical

ID	Description	Qty	Unit	Unit Cost	Priority
REQ-06	Electrical distribution board upgrade	1	install	\$38,000.00	high
REQ-07	LED lighting throughout	220	fixtures	\$280.00	medium

Subtotal: \$99,600.00

Interior

ID	Description	Qty	Unit	Unit Cost	Priority
REQ-08	Interior fit-out — community rooms	3	rooms	\$85,000.00	high
REQ-09	Foyer and reception fit-out	1	job	\$62,000.00	medium

Subtotal: \$317,000.00

Accessibility

ID	Description	Qty	Unit	Unit Cost	Priority
REQ-10	DDA access ramp + lift COMP-3	1	job	\$78,000.00	high

Subtotal: \$78,000.00

External

ID	Description	Qty	Unit	Unit Cost	Priority
REQ-11	Car park reseal + line marking	1	job	\$24,000.00	medium

Subtotal: \$24,000.00

Remediation

ID	Description	Qty	Unit	Unit Cost	Priority
REQ-12	Asbestos removal and disposal COMP-4	1	job	\$55,000.00	high

Subtotal: \$55,000.00

Milestones

Date	Milestone	Status
Aug 01, 2026	Asbestos clearance certificate	Pending
Sep 15, 2026	Structural works — practical completion	Pending
Dec 01, 2026	Envelope complete (roof + façade)	Pending
Feb 15, 2027	M&E services commissioned	Pending
May 01, 2027	Interior fit-out complete	Pending
Jun 30, 2027	Practical completion — project	Pending

Budget Details

Structural

ID	Description	Qty	Unit	Unit Cost	Total
BUD-01	Base isolation system (REQ-01)	1	system	\$320,000.00	\$320,000.00
BUD-02	Moment-resisting frames (×4) (REQ-02)	4	frames	\$45,000.00	\$180,000.00

Category subtotal: \$500,000.00

Envelope

ID	Description	Qty	Unit	Unit Cost	Total
BUD-03	Roof replacement (REQ-03)	1	job	\$185,000.00	\$185,000.00
BUD-04	Façade repointing + membrane (REQ-04)	680	m²	\$180.00	\$122,400.00

Category subtotal: \$307,400.00

Mechanical

ID	Description	Qty	Unit	Unit Cost	Total
BUD-05	HVAC — VRF system (REQ-05)	1	system	\$145,000.00	\$145,000.00

Category subtotal: \$145,000.00

Electrical

ID	Description	Qty	Unit	Unit Cost	Total
BUD-06	Electrical board upgrade (REQ-06)	1	install	\$38,000.00	\$38,000.00
BUD-07	LED lighting (220 fixtures) (REQ-07)	220	fix.	\$280.00	\$61,600.00

Category subtotal: \$99,600.00

Interior

ID	Description	Qty	Unit	Unit Cost	Total
BUD-08	Community room fit-out (×3) (REQ-08)	3	rooms	\$85,000.00	\$255,000.00
BUD-09	Foyer fit-out (REQ-09)	1	job	\$62,000.00	\$62,000.00

Category subtotal: \$317,000.00

Accessibility

ID	Description	Qty	Unit	Unit Cost	Total
BUD-10	DDA ramp + lift (REQ-10)	1	job	\$78,000.00	\$78,000.00

Category subtotal: \$78,000.00

External

ID	Description	Qty	Unit	Unit Cost	Total
BUD-11	Car park reseal (REQ-11)	1	job	\$24,000.00	\$24,000.00

Category subtotal: \$24,000.00

Remediation

ID	Description	Qty	Unit	Unit Cost	Total
BUD-12	Asbestos removal (REQ-12)	1	job	\$55,000.00	\$55,000.00

Category subtotal: \$55,000.00

Additional Costs

Description	Amount
Contractor margin + prelims (12%)	\$183,120.00
Contingency — unforeseen conditions (8%)	\$122,080.00
Consultant fees (PM, QS, Engineers)	\$95,000.00

Line Items Subtotal

\$1,526,000.00


Additional Costs

\$400,200.00

Grand Total

\$1,926,200.00

Gantt Chart

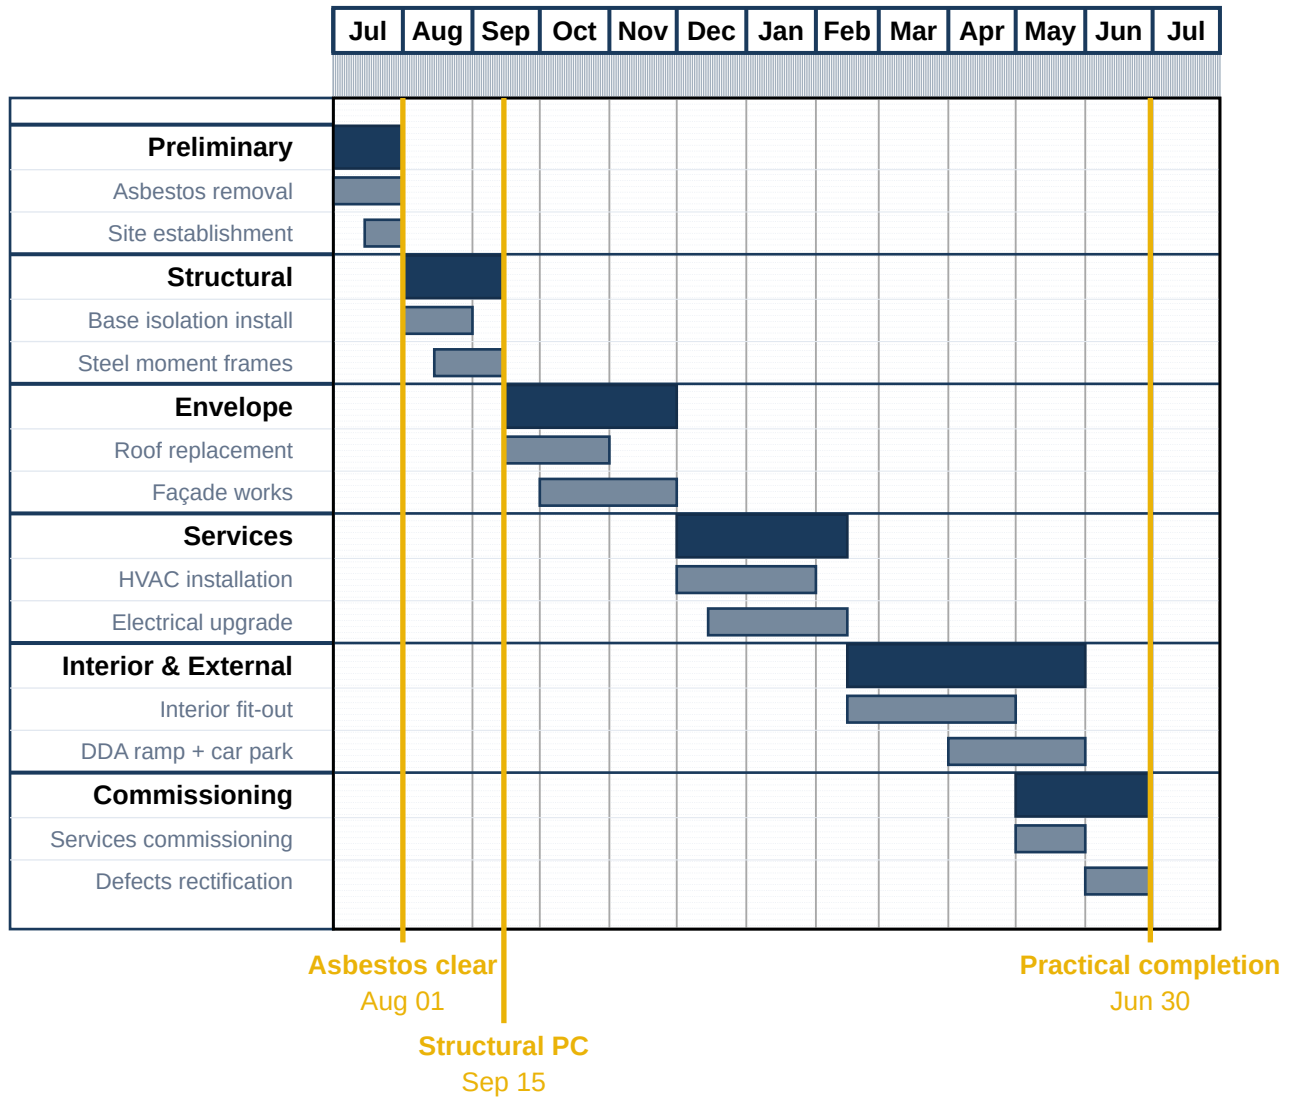

Quality Plan

Standards

- NZS 3101:2006 — Concrete Structures Standard
- NZS 3404:1997 — Steel Structures Standard
- NZS 4218:2009 — Energy Efficiency
- NZBC Clause F8 — Signs (accessibility)

Acceptance Procedure

Hold-point inspections at each milestone. BCA consent authority sign-off required at structural, envelope, and services stages.

Testing Strategy

Seismic IEP assessment post-structural works. HVAC commissioning report. Air-tightness blower-door test.

Quality Criteria

Requirement	Criterion	Method
REQ-01	IEP score $\geq$ 67% NBS	Peer-reviewed IEP assessment
REQ-03	Air-tightness < 3 ACH @ 50Pa	Blower-door test
REQ-05	HVAC commissioned to spec	Commissioning report

Communication Plan

What	Audience	Frequency	Channel	Owner
Site progress report	Council project manager	Weekly	Email + Procore	Head contractor
Community newsletter	Residents & users	Monthly	Council website	PM
BCA hold-point notice	Building consents	Per hold pt	InspectionXpress	PM
Heritage consultation	Heritage NZ	Milestone	Formal letter	Architect

Risk Management Strategy

Approach

Construction risk managed under AS/NZS 4360. Contractor holds site-specific risk register reviewed weekly in progress meetings.

Risk Categories

- Ground conditions
- Heritage fabric
- Weather / programme
- Regulatory
- Cost escalation

Thresholds & Scoring

Scoring: 5×5 likelihood × consequence matrix

Tolerance: No High risks unmitigated before works commence in that zone.

Escalation threshold: Any Very High risk paused immediately; reported to council within 24h.

Compliance Register

ID	Regulation	Jurisdiction	Requirements	Status
COMP-1	NZS 3101:2006 — Seismic Design Audit: Sep 15, 2026	NZ	REQ-01, REQ-02	Pending
COMP-2	Heritage NZ Act 2014 — Listed Building	NZ	REQ-04	Compliant
COMP-3	NZBC Clause D1 — Access Routes	NZ	REQ-10	Pending
COMP-4	HSWA 2015 — Hazardous Substances Audit: Aug 01, 2026	NZ	REQ-12	Compliant

Project Team

Role	Name	Contact
Project Manager	Sarah Kim	s.kim@councilpm.nz
Head Contractor	Dave Structural Ltd	d.structural@works.nz
Structural Engineer	Ana Ferreira PE	a.ferreira@structeng.nz
Quantity Surveyor	Tom Walsh MNZIQS	t.walsh@qs.nz
Heritage Architect	Lena Park	l.park@heritage-arch.nz

Execution

Status Report

Overall Health

Good

Budget Spend

0%

Schedule Variance

0d

Executive Summary

Project in mobilisation phase. Asbestos contractor on-site from July 1. All consents issued.

Risk Matrix

ID	Risk	Mitigation	Probability	Impact	Status
R1	Unexpected asbestos quantities beyond initial survey	Provisional sum in budget; daily progress monitoring with licensed removalist Affects: T1? Blocks: M1 From assumption: A-3	Medium	High	Open
R2	Ground conditions worse than geotechnical report (soft pockets)	Provisional sum for ground improvement; engineer present at foundation level Affects: T3?	Low	High	Open
R3	Heritage NZ direction to halt works on façade discovery	Pre-engagement with Heritage NZ; photographic record before any works Affects: T6?	Low	High	Open
R4	Steel price escalation beyond contract allowance	Fixed-price subcontract for structural steel locked in at contract award	Medium	Medium	Monitoring
R5	Wet weather delays to envelope programme	Weather days allowance in programme; temporary roofing over critical zones Affects: T5?, T6?	High	Medium	Monitoring

Issue Log

ID	Issue	Owner	Status
I1	Asbestos survey identified additional AIB in roof void not in original scope Blocks: M1	Sarah Kim	In-Progress

Change Log

ID	Change Description	Type	Affects Baseline	Approval
C1	Additional asbestos removal — roof void AIB	scope	baselines.financials.budget	Pending
C2	Substitute VRF brand due to lead-time (equiv. spec.)	procurement	baselines.requirements	Approved

Decision Log

ID	Decision / Rationale	Date	Maker	Reversibility
DEC-1	Retain base isolation over traditional wall bracing <i>Base isolation provides 20% better seismic performance and reduces fit-out disruption.</i>	2026-05-10	Ana Ferreira PE	Type-1
DEC-2	Proceed with fixed-price steel subcontract despite spot market <i>Budget certainty outweighs potential savings; council requires fixed-price delivery.</i> Prompted by risk: R4	2026-05-20	Sarah Kim	Type-1

Deliverables Register

ID	Description	Owner	Due Date	Requirements	Status
D1	Asbestos clearance certificate	Licensed removalist	2026-08-01	REQ-12	Planned
D2	Structural works — as-built drawings	Ana Ferreira PE	2026-09-30	REQ-01, REQ-02	Planned
D3	Building consent CCC — structure	BCA	2026-10-15	REQ-01	Planned
D4	HVAC commissioning report	M&E contractor	2027-02-28	REQ-05	Planned
D5	NatHERS 7.5★ certificate	Energy assessor	2027-03-15	REQ-03, REQ-05	Planned
D6	Project CCC — practical completion	BCA	2027-07-15	REQ-10	Planned

Closure

Formal Sign-Off

Stakeholder	Role	Date/Signature
Sarah Kim	Project Manager	_____
Riverside District Council	Client Representative	_____
Structural Works Ltd	Head Contractor	_____
Heritage NZ	Heritage Approval	_____

Custom Sections

Site Safety Plan

Emergency Protocols

All personnel must complete site-safety induction before entering the works area. Emergency assembly point: north car park. Site supervisor carries first-aid kit at all times.

PPE Requirements

Hard hat, hi-vis vest, steel-toed boots, and safety glasses are mandatory on-site. Hearing protection required in machinery zones.